

Connect 2 Control

Tubing for Bio Pharm – Medical – Beverage – Chemical & Industrial Applications

info@c2c.co.nz

www.c2c.co.nz

ph 09 5356677

Easyflow

Formula E99

Max Hydraulic Pressure	7 Bar / 100 Psi
Temperature Range	-15 to 60 °C
Tensile Strength	19 MPa
Specific Gravity	1.23 ± 0.02



Main Applications


- Transfer of beverages and potable water
- Visual monitoring of fluid flow
- Wet or dry foodstuff handling
- Low pressure pump discharge lines
- Where high flexibility is required

Features

- Smooth bore for excellent flow characteristics
- Transparent with blue tint for a clear view of fluid flow
- Very resilient to impact and kink
- Resistant to dilute acids and alkalis
- Safe for food contact - AS2070 Compliant
- Corrosion and abrasion resistant

Product Code	ID (mm)	OD (mm)	Standard Coil (m)
E99-03	3.00	5.00	30
E99-05	5.00	8.00	30
E99-55	5.50	9.00	30
E99-06	6.00	9.00	30
E99-08	8.00	11.00	30
E99-10	10.00	13.00	30
E99-12	12.00	16.00	30
E99-16	16.00	20.00	30
E99-19	19.00	23.00	30
E99-25	25.00	31.00	30
E99-32	32.00	37.00	30
E99-40	40.00	47.00	15
E99-50	50.00	58.00	15

Material Properties Quick Reference

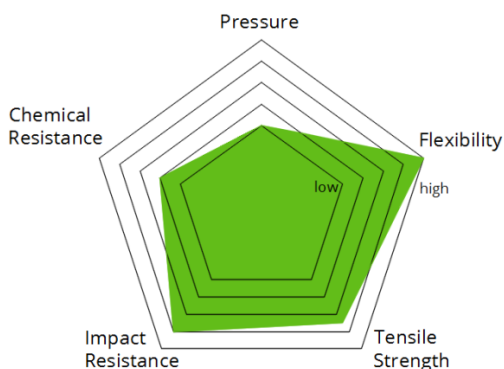

Colour Range

Clear with Blue Tint