

Proportional Valves



EVP SERIES

- Fast response
- Long life
- Low friction and wear
- Flow proportional to input current

pp. 54-57



DVP SERIES

- Low hysteresis
- Fast response times
- Large flows in a small, sleek design
- Low heat rise
- Low power

pp. 58-59




SCPV SERIES

- 2% hysteresis
- Excellent linearity—2.5% of full-scale
- 2 ms reaction time
- Holds position for power savings or at a loss of power

pp. 60-61

Many items also available with metric ports.
For more information, visit clippard.com/link/metric

COMING SOON!



PROPORTIONAL ISOLATION SERIES

- *Specially designed for analytical and biomedical applications*
- *Precision control at low flow ranges*
- *Diaphragm isolation capability*
- *Low internal and dead volume*
- *Compact, low profile design*

p. 62

PROBLEM

Many types of medical and analytical applications require very precise gas metering. In this case, the customer was experiencing a variety of issues with their existing system. Technicians were having a hard time calibrating the system and overall, it was proving to be very unreliable. They were interested in exploring other options that might improve their system's performance.

SOLUTION

Utilizing the industry's most robust and powerful linear actuator, Clippard's high flow stepper-controlled proportional valve provides exceptional performance and durability. A trusted solution for critical gas delivery applications requiring high resolution, high flow, and low hysteresis, Clippard's SCPV series proved to be perfectly suited for this application.

A special benefit of the SCPV series is its unique design which allows for custom flow profiles. For this application, Clippard was able to determine a very specific needle taper that was ideal for this particular use. After applying the specialized profile, the modified SCPV valve was successfully integrated into a newly designed, more compact system. In addition to providing greater reliability, the final solution also proved to be more efficient and much easier to use.

WHAT CAN CLIPPARD DO FOR YOU?

877-245-6247



EVP SERIES MOUSE VALVES

2-WAY PROPORTIONAL VALVES





- Flow proportional to input current
- Fast response and long life
- Small, compact design
- Single moving part for low friction and wear
- Five orifice sizes
- Three connection styles
- Two mounting types

OPERATING PRESSURE

The EVP proportional valve can be calibrated for pressures less than the maximum pressure shown. Lower pressures may be substituted in increments of 5 psig, and will be used for calibration. For pressures less than 5 psig, call **877-245-6247**.

Note: Voltage, orifice, and pressure are determined by the part number (see p. 56).




APPLICATIONS

- Analytical Instruments
- Blood pressure monitoring
- Precise pressure control
- Patient simulators
- Gas controllers
- Mass flow control
- Gas chromatography
- Respirators/ventilators


The EVP series proportional control valves combine the features of the existing EV series valve—long life, low power, and Clippard’s reputation for high quality components—with the additional capability for proportional control. The EVP series valve provides air or gas flow control and varies the output flow based on the current input to the solenoid.

Controllability and overall value are the main features of the EVP proportional valve series. The consistent gain (see chart) of this valve provides a high degree of control for many applications. The valve may be controlled using DC current, open or closed-loop control, and even PWM (pulse width modulation) to cover a broad range of applications.

Medium	Clean, dry air or inert gases
Power Consumption	1.9 watts @ 73°F 2.3 watts max.
Temp. Range	32 to 120°F
Ports	#10-32 Female (in-line) #10-32 Male stud (manifold) <i>See p. 20 for manifold options</i>
Seal Material	Nitrile standard FKM, EPDM, and others available
Max. Hysteresis	10% of full current
More Details	clippard.com/link/evp

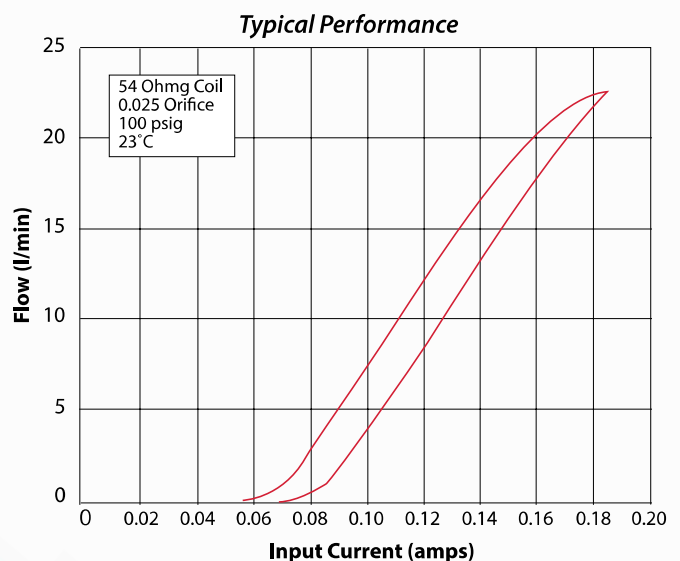


EVP Series Proportional Mouse Valves

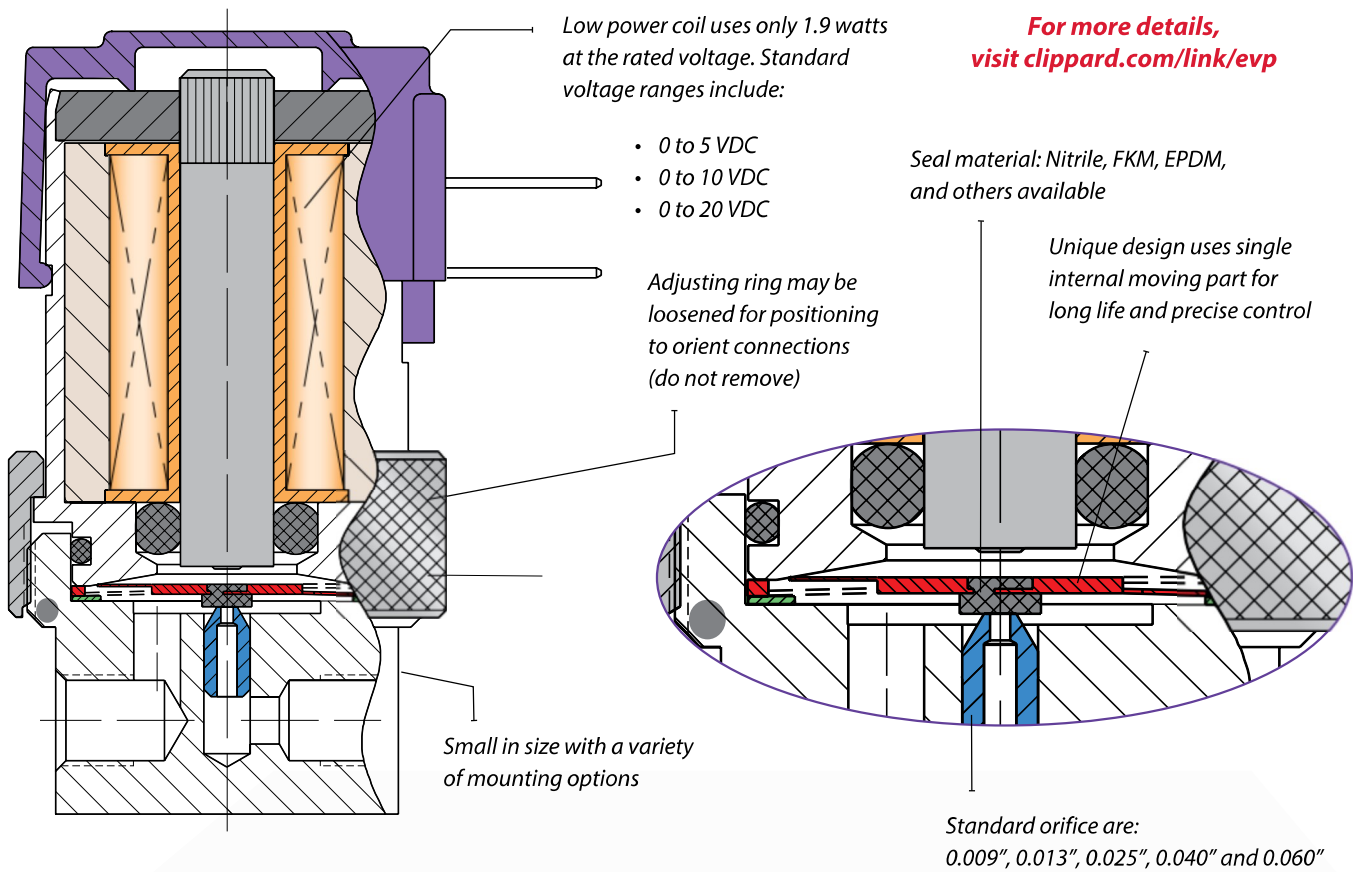

PROPORTIONAL VALVES


Maximum Flow vs. Operating Pressure

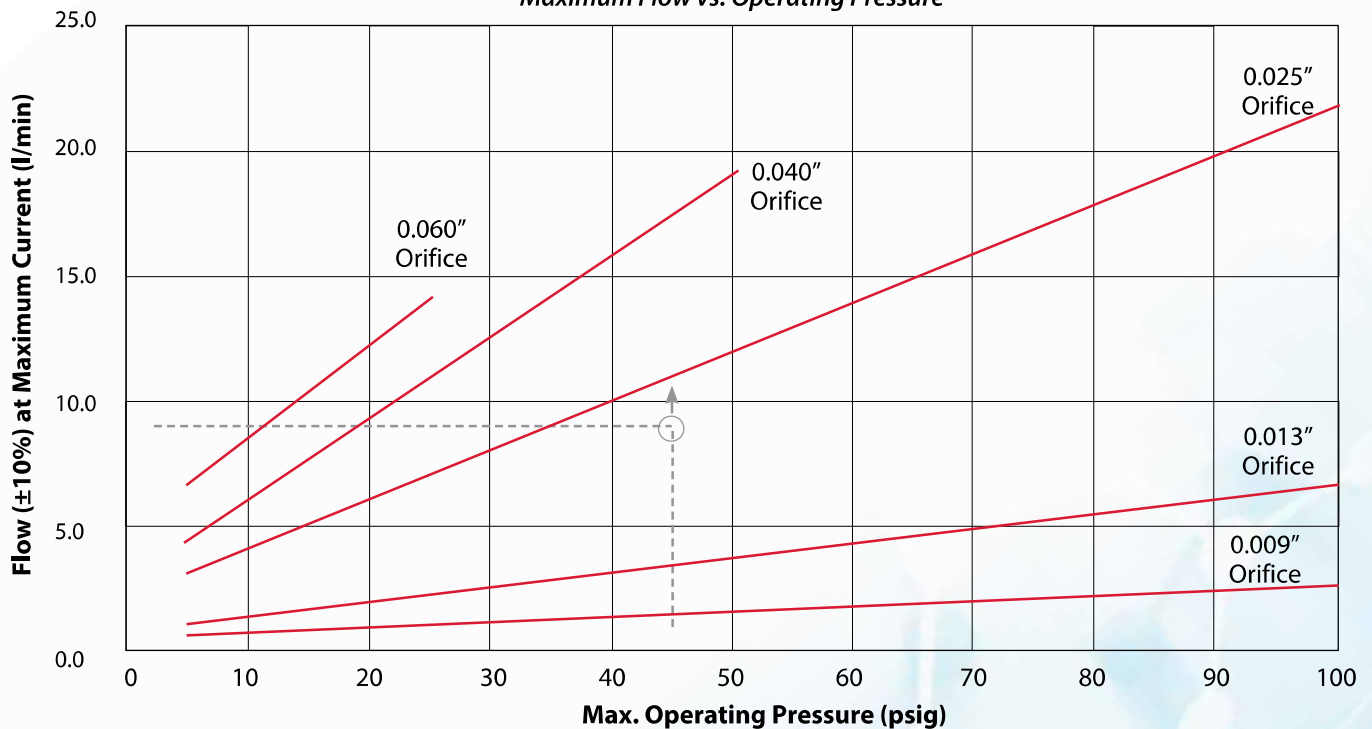

To determine the correct orifice required, locate the colored line immediately above the flow/pressure intersection
 Example: 9 slpm required at 45 psig inlet. This example leads to a "-2545" valve (0.025" nozzle, 45 psig).

EVP SERIES MOUSE VALVES

2-WAY PROPORTIONAL VALVES, IN-LINE & MANIFOLD MOUNT

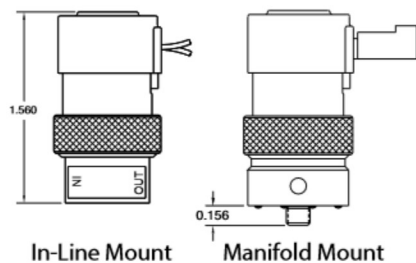

		Voltage		In-Line Mount	Manifold Mount
	 0.025" Pin Connector	•		EC-P-05-□□□□	EC-PM-05-□□□□
			•	EC-P-10-□□□□	EC-PM-10-□□□□
			•	EC-P-20-□□□□	EC-PM-20-□□□□
	 Spade Terminals	•		ET-P-05-□□□□	ET-PM-05-□□□□
			•	ET-P-10-□□□□	ET-PM-10-□□□□
			•	ET-P-20-□□□□	ET-PM-20-□□□□
	 Wire Leads Side (Radial)	•		EV-P-05-□□□□	EV-PM-05-□□□□
			•	EV-P-10-□□□□	EV-PM-10-□□□□
			•	EV-P-20-□□□□	EV-PM-20-□□□□

Operating Range & Orifice

When selecting your valve, there are many variables to choose from.

To choose the best valve for your application, focus on:

1. The control signal
2. Valve orifice
3. Operating pressure

Consult factory to discuss availability of non-standard voltages and other customization options.

Although the valves are listed by voltage, their flow is proportional to the current. It is crucial to specify and use a valve set to your operating pressure to assure optimal performance for your exact requirements. Proportional flow is achieved by varying the current input to the valve.

The EVP valve can be calibrated for pressures less than the maximum shown. Lower pressures may be substituted in increments of 5 psig, and will be used for calibration. The pressures shown are standard options. For pressures less than 5 psig or greater than the maximum pressure listed, please consult Clippard.

CONTROL SIGNAL

Nominal Voltage Range @ 72°F (VDC)	Input Current Range (amps)	Coil Resistance @ 72°F (ohms)	Max. Voltage Required (VDC)
0 to 5	0 to 0.370	13.5	6.2
0 to 10	0 to 0.185	54	12.4
0 to 20	0 to 0.092	218	24.8

Do not exceed input current range

STANDARD ORIFICES & FLOW

Orifice	Max. Flow (l/min)	Part No. Code	Max. Pressure
0.009"	2.7 ±10%	09	100 psig
0.013"	6.7 ±10%	13	100 psig
0.025"	22.0 ±10%	25	100 psig
0.040"	18.7 ±10%	40	50 psig
0.060"	14.0 ±10%	60	25 psig

Note: Max. flow is measured at max. pressure

ORDERING INFORMATION

Base Part No. →

See chart above

Example Part Number:
EC-P-05-0905-V



Orifice*	Orifice
09	0.009" dia.
13	0.013" dia.
25	0.025" dia.
40	0.040" dia.
60	0.060" dia.

Max. Pressure (5 psig to 100 psig)

□ In increments of 5, from 05 to 95
AO 100 psig

Options

- (blank) Nitrile (standard)
- E EPDM¹
- V FKM¹

¹Min. order quantity required for EPDM or FKM seals

*See max. pressure in Standard Orifices & Flow chart above

EVP SERIES MOUSE VALVE DRIVER

PROPORTIONAL VALVE DRIVER



- Plug-and-play interface between Clippard's EVP and DVP series valves and PLCs or other controls
- Linearized valve response right "out of the box"
- Three selectable valve output ranges
- Five signal inputs to choose from
- Easy integration with existing machine controls
- User-adjustable parameters
- Automatic temperature compensation to maintain constant current
- Two configuration options: Stand-alone PCB or enclosed in housing
- Compact size

Power Requirements

Power input requirements are specified as supply voltage ranges for each EVP or DVP valve. Supplying voltages outside of these ranges may result in valve malfunctioning. Power requirements are determined by the valve voltage specification.


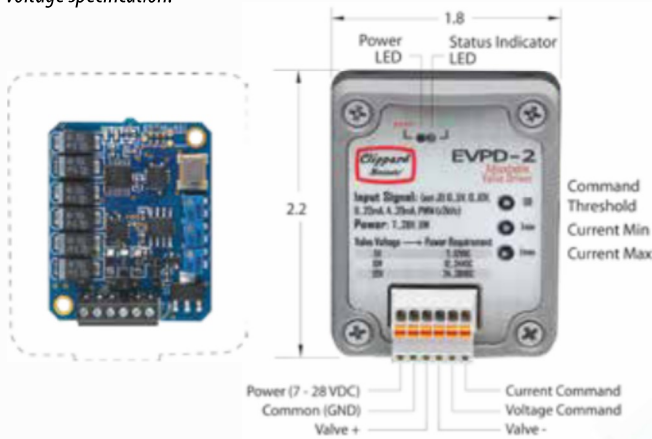


Figure 1: Effect of Driver Output on EVP or DVP Flow

The EVPD Proportional Valve Driver fast-tracks valve control applications. This product is ideal for laboratories and OEM product development, and can be customized to fit OEM applications including control parameters. The EVPD produces driver current for Clippard's EVP or DVP series valves proportional to input control signals.

Power Requirement	7 to 28 VDC @ 5 watt
Input Impedance	200 kΩ
Command Set-Point Signal Type	Selectable: 0 to 5 VDC, 0 to 10 VDC, 0 to 20 mA, 4 to 20 mA, PWM @ ≥ 2 kHz duty cycle
Adjustments	Min. drive current, max. drive current, command deadband
LED Indicators	Power, activity status, and faults
Output	0 to 0.4 (selectable range)
Temperature Range	0 to 155°F
Size	Open card: 1.5" x 1.3" x 0.4" unmounted Enclosed: 2.2" x 1.8" x 0.7" excluding DIN clip
More Details	clippard.com/link/evpd

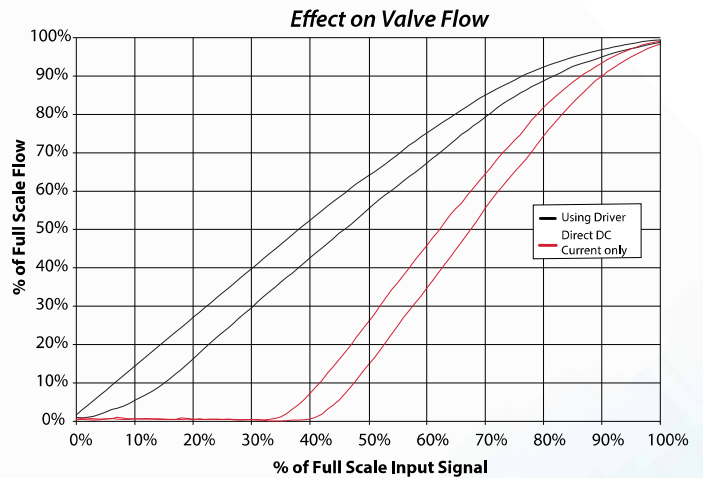

EVP Valve Type	Input Voltage Range	EVPD Max. Output*
0 to 5 VDC	7 to 12 VDC	400 mA
0 to 10 VDC	12 to 28 VDC	200 mA
0 to 20 VDC	14 to 28 VDC	100 mA

*See EVP/DVP valve current requirements

Part No.	Description
EVPD-2	EVPD Driver Assembly in Enclosure
EVPD-1	EVPD Driver Board
EVPD-2DIN	DIN Rail Mounting Clip (shown at right) with screws



DVP SERIES HIGH FLOW VALVES


2-WAY PROPORTIONAL VALVES, MANIFOLD MOUNT



Clippard’s DVP series proportional solenoid valves are precision-built 2-Way control valves. This powerful series was designed as the next generation of the well-known and trusted original EV line of Clippard “Mouse” valves. With a life of over a billion cycles, a solid, compact design, and extremely high flow rates, these valves are suitable for many applications across numerous industries.


Controllability and overall value are the main features of the DVP series. The DVP valve provides air or gas flow control and varies the output flow based on the current input to the solenoid. The valve’s consistent gain (see chart) provides a high degree of control. It may be controlled using DC current, open or closed-loop control, and even pulse width modulation (PWM) to cover a large range of applications.

Typical Performance

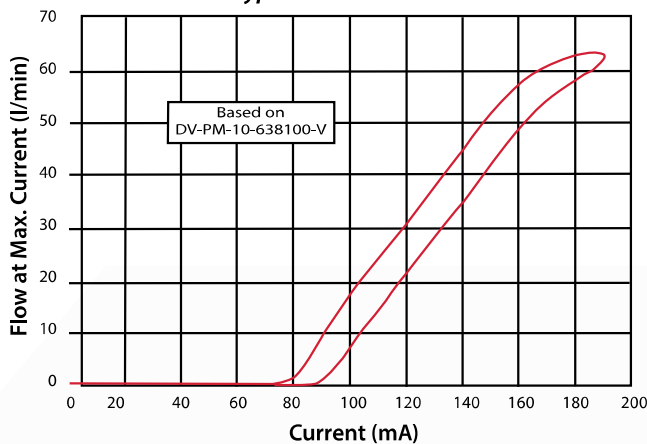

- Industry standard for leak-free operation
- Over 1,000,000,000 cycles
- Extremely low hysteresis
- Fast response time
- Large flows in small, sleek design
- Low heat rise/low power
- Robust stainless steel “spider” flat armature spring

DVP Flow Capabilities

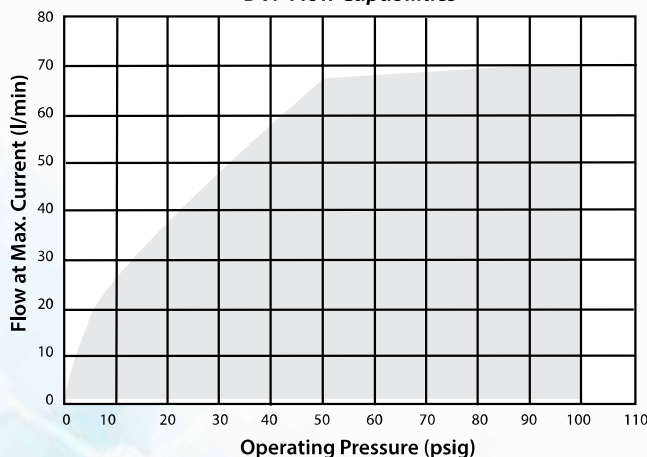

Valve Type	2-Way, Proportional
Medium	Air or compatible gases (40 micron filter)
Pressure Range	Vac* to 100 psig
Max. Hysteresis	10% of full current
Max. Flow Tolerance	+10% / -0%
Power Consumption	1.9 watts at 72° F, 2.5 watts max.
Temperature Range	32 to 120° F
Voltage	10 or 20 VDC
Mounting	Manifold, #10-32 male stud
Seal Material	FKM standard Nitrile, EPDM, and silicone available
Wetted Materials	Stainless steel, PPS
Certifications	CE, RoHS, REACH
More Details	clippard.com/link/dvp

For custom flow and pressure configurations, call 877-245-6247



*Vacuum applications are reverse flow

DVP SERIES VALVES & MANIFOLDS

MANIFOLDS & ADDITIONAL INFORMATION

In selecting your valve, reference the **DVP Flow Chart** (opposite, p. 58) and list your nominal operating pressure in a 3-digit format (065 = 65 psig). Next, specify your desired max. flow rate for your pressure (500 = 50.0 l/min). Accurately specify your nominal operating pressure and flow to assure the best performance and resolution for your application. For nominal operating pressure under 5 psig, use a 005 designator for pressure. For vacuum applications use the positive pressure equivalent and reverse the ports.

Although the valves are listed by voltage, their flow is proportional to the current. It is crucial to specify and use a calibrated valve that matches your application. To assure you have optimal performance, be sure to use a valve set to your operating pressure. Proportional flow is achieved by varying the current input to the valve.


For more details, visit clippard.com/link/dvp



PROPORTIONAL VALVES

Nominal Voltage Range @ 72° F	Input Current Range	Coil Resistance @ 72° F	Max. Voltage Required
0 to 10 VDC	0 to 0.190 amps	52.6 ohms	13 VDC
0 to 20 VDC	0 to 0.095 amps	210.5 ohms	26 VDC

ORDERING INFORMATION

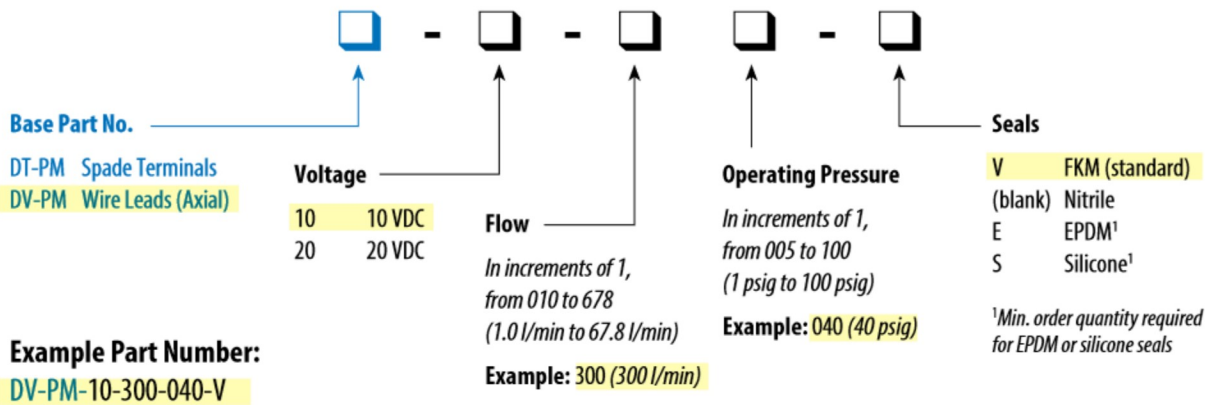

DVP valves are equipped with a bottom stud, 5/32" long with #10-32 thread, which fits Clippard standard and special manifolds, accessory valves and subplates. Spanner holes in the valve body permit tightening.

Call 877-245-6247 to discuss non-standard voltages and other options.

SINGLE-STATION MANIFOLDS

Material ENP Brass
 Other materials also available, call 877-245-6247.

Part No.	Description
15490-5	Single-Station Manifold



MULTI-STATION MANIFOLDS

Material Black anodized aluminum
Ports 1/8" NPT

Part No.	Description
15781-2	2-Station Manifold
15781-4	4-Station Manifold
15781-6	6-Station Manifold




STEPPER-CONTROLLED SCPV SERIES

2-WAY PROPORTIONAL VALVES




Characteristic Curve
Flow Rate for SCPV-1-3 @ 100 psig

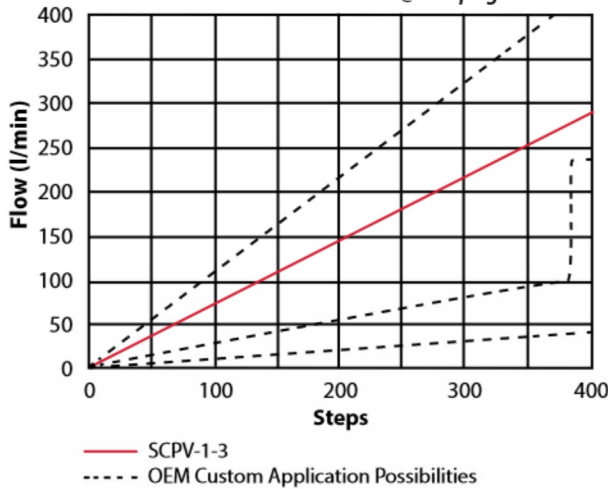

Part No.	Description
SCPV-1-3	Proportional Valve, In-Line
SCPV-1-3M	Proportional Valve, Manifold
SCPV-1-3C	Proportional Valve, Cartridge

Stepper-controlled linear actuator with acme lead screw

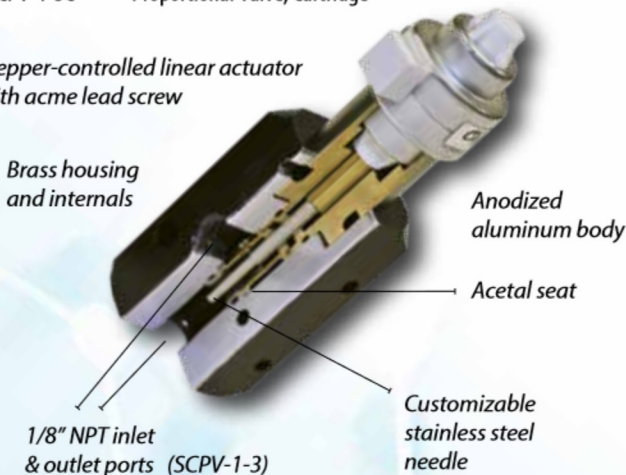

Utilizing the industry's most robust and powerful linear actuator, the high flow stepper-controlled proportional valve outperforms the competition in performance and durability. The SCPV valve is ideal in critical applications such as gas delivery, medical, analytical, and industrial automation requiring high resolution, high flow, and low hysteresis. In addition, the unique design allows for custom flow profiles when required.

- Less than 2% hysteresis
- Excellent linearity—less than 2.5% of full-scale
- 2 ms reaction time
- Millions of cycles
- Holds position for power savings or at a loss of power

Medium	Air or compatible gases
Typical Cycle Time for Full Travel	0.95 seconds @ 100% duty cycle 0.55 seconds @ 25% duty cycle <i>(full open to full close or full close to full open)</i>
Wetted Material	Stainless steel, aluminum, brass, acetal, and FKM*
Pressure Range	Vac to 100 psig*
Flow Range	0 to 280 l/min <i>Special configurations over 500 l/min available*</i>
Flow Resolution	0.7 l/min per step
Position Resolution	0.001" per step
Temperature Range	32 to 184°F
Driver	Bipolar chopper drive required
Needle	3.5°
Supply Voltage to Motor	5 VDC
Response Time	0.95 seconds fully-open to fully-closed
Mounting	In-line, manifold, or cartridge
Power Consumption	3.85 watts nominal only during adjustment Zero power consumption to maintain position
Seals	FKM standard, others available*
Option	Rubber seat (<i>add -R suffix</i>)
More Details	clippard.com/link/scpv

*This product is highly modifiable for OEM applications—including alternate body materials, flow profiles, and more. Clippard has successfully produced special configurations of the SCPV with flows over 700 slpm at 100 psig. Call 877-245-6247 today to discuss your needs.




STEPPER-CONTROLLED SCPV SERIES & DRIVER

PROPORTIONAL VALVE

LINEAR ACTUATOR CHARACTERISTICS

Wiring	Bipolar
Current/Phase	385 mA
Motor Voltage	5 VDC
Resistance/Phase	13 ohms
Inductance/Phase	8.08 mH
Power Consumption	3.85 watts
Temperature Rise	135°F
Insulation Resistance	20M ohms

Wiring Harness (included)



Pin	Color	Pin	Color
1	Red (A+)	3	Green (B-)
2	Black (A-)	4	Blue (B+)

Maximum Step Pulse Frequency vs. Operating Pressure



SCPVD BI-POLAR STEPPER MOTOR DRIVER

The SCPVD is a bi-polar stepper motor driver board which can be used for stepper motors up to a max 2A/phase. It is based on the Allegro A4988 motor driver. The driver requires a motor drive voltage of 7 to 35 volts. An external controller is required to deliver step and direction signals to the driver board. The SCPVD is capable of micro-stepping and defaults to a 16th step micro-stepping mode. The step mode as well as several other options such as sleep, enable, and reset can be toggled on and off.




- Medical, analytical, and industrial gas mixing
- Anesthesia equipment
- Precision flow control
- Cuff/bladder pressure control
- Process flow control
- Variable speed control
- Automation of needle valve

For more details, visit clippard.com/scpv



Part No.	Description
SCPVD-1	SCPVD-1 SCPV Valve Driver

Functional Diagram

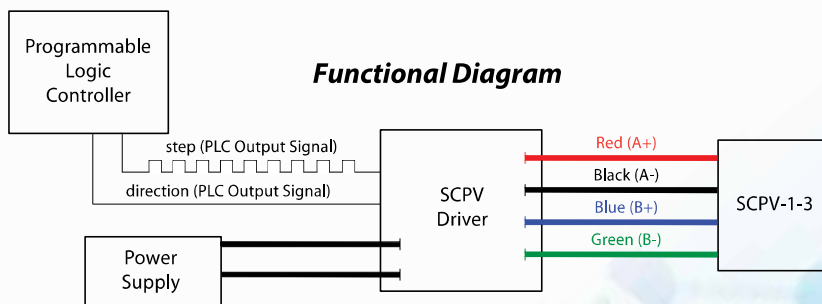


PROPORTIONAL ISOLATION

NEEDLE VALVE


COMING SOON!

Clippard's next-generation proportional valve is specially designed for maximum controllability of fluid in medical and analytical applications. This unique valve is able to be customized to meet the specific flow, pressure, life, and control requirements your applications demand.

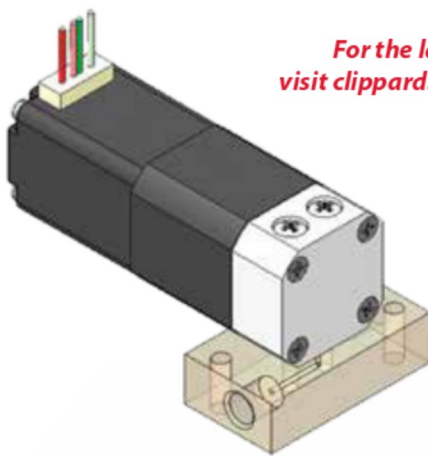

*For the latest details,
visit clippard.com/link/pro-iso*

**Specifications not final.*

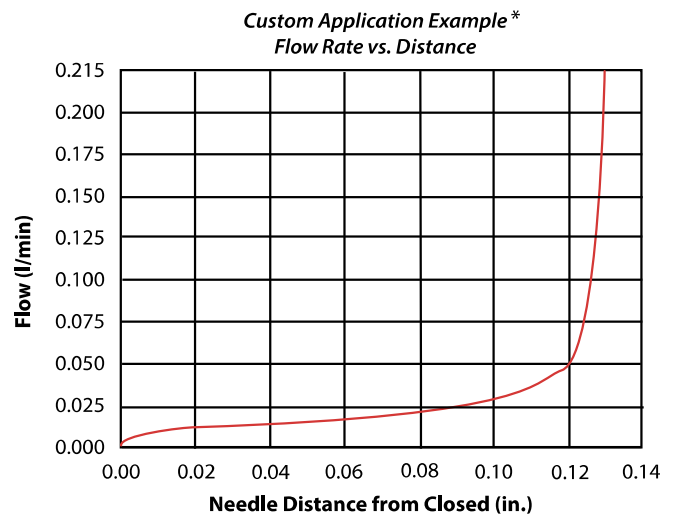

- Specially designed for analytical and biomedical applications
- Able to handle a wide variety of flow ranges
- Precision control at low flow ranges
- Diaphragm isolation capability
- Low internal and dead volume
- Compact, low profile design
- Quiet operation



For all the latest product news and updates, visit us online at

clippard.com

Product Specifications • 2D & 3D Files • Online Ordering